



LEADING DESIGNER AND MANUFACTURER OF MOBILE STAGES AND PROMOTIONAL UNITS

• CONFIGURATION

50' x 38' (15.24 m x 11.58 m)
up to 90' x 56' (27.43 m x 17.07 m)
with covered wings and backstage

• SET UP TIME



4 to 5 hours
1 certified technician
4 stagehands

• WIND RESISTANCE

90 mph (145 km/h) without windwalls
60 mph (97 km/h) with windwalls

• FULL HEIGHT RAINPROOF WINDWALLS ON 3 SIDES

• CERTIFIED BY PROFESSIONAL ENGINEERS IN EVERY STATE AND PROVINCE

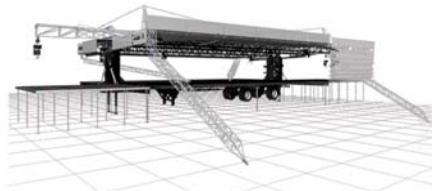


STAGELINE® SAM 555

SPECIFICATIONS

- **Load bearing capacity:** 58,000 lb (26,308 kg)
- **Roof maximum load capacity:** 42,000lb (19,051 kg)
- **Roof maximum height:** 33' (10.02 m) from deck
- **Clearance:** 30' from deck
- **Lateral rigging beams:**
For rigging sound including line arrays
Capacity: 8,000 lb (3,629 kg) per side
Height: 39'-6" (12.04 m) from ground
- **Overall height from ground:** 45'-2" (13.76 m)
- **Floor:**
Size: 50' x 38' (15.24 m x 11.58 m)
Capacity: Rated at 150 lb / sq. ft (732 kg/m²)
Height: 6' to 7'-6" (1.82 m to 2.29 m)
- **Roof:** fiberglass bonded to steel
- **16 rigging points** (4 moveable)
- **1 stairway with handrails**

OPTIONAL

- **Fire retardant windwalls on 3 sides:**
Vinyl or mesh
Full color graphic printing
- **Skirting**
- **Covered wing extensions:**
Refer to covered wing specifications
- **Sound wing extensions:**
16' x 16' (4.88 m x 4.88 m) with guardrails
- **Additional decks:** up to 90' x 56' (27.43 m x 17.07 m)
with 4' x 8' (1.22 m x 2.44 m) platforms
(requires additional transportation)
- **1 Rooftop banner support:**
up to 97' x 5' (29.57 m x 1.52 m)
- **2 Lateral banner supports:**
up to 22' x 32' (6.86 m x 9.75 m)
- **Lateral overhang trussing extension:**
for 22' (6.86 m) banners
- **Publicity space:**
Rolling billboard to maximize visibility during transportation
Multiple banners of various sizes attach to structure
for optimum visibility
- **Guardrails**

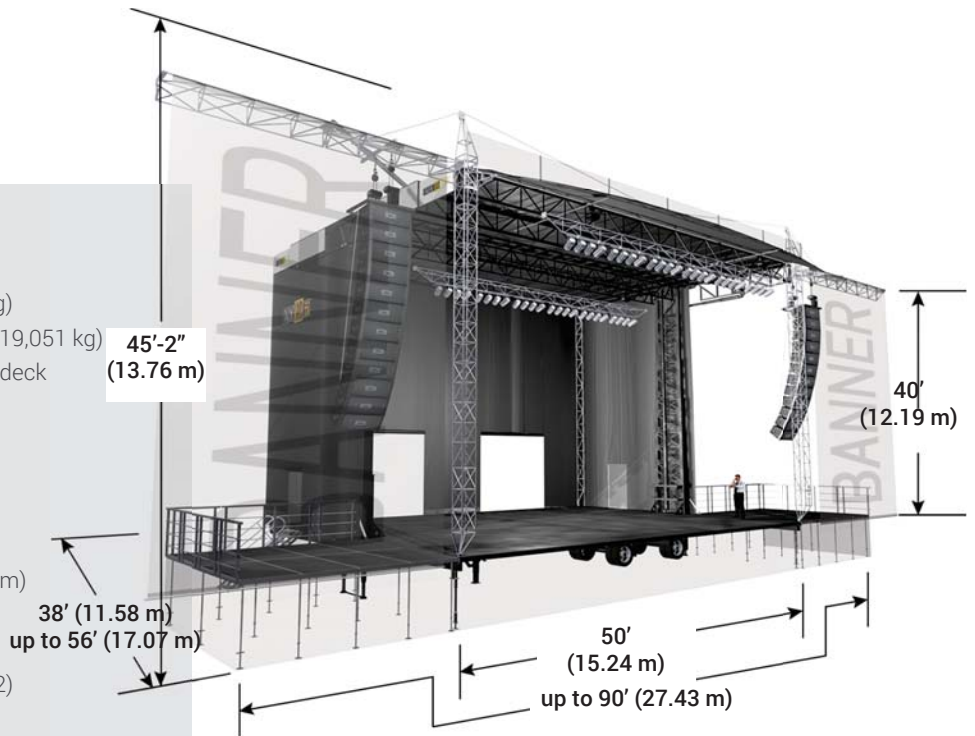

SET UP TIME:

4 hour



MANPOWER:

5 x



WHY THE INDUSTRY CHOOSES STAGELINE® PRODUCTS:

- **Manufacturing:** Stageline has built over 600 units.
- **Expertise:** Stageline has been designing mobile stages for over 25 years.
- **100% fail proof history:** Best safety record in the industry.
- **Reliability in engineering:** Highest wind resistance, with or without windwalls.
- **Wide range of models:** SL50, SL100, SL100-Mix, SL260, SL320, SAM555, SAM750, Promobile, Covered wings & Backstage.
- **Rain or shine:** Complete rainproofing with full height windwalls and downstage canopies.
- **Single trailer:** All stage components travel in one stage trailer unit.
- **Quality:** Designed and built to last over 25 years. All units built to date are still in operation. Quality controlled with a 600-point inspection.
- **Standards:** All units are engineered to withstand 2 times the permitted load.



Due to STAGELINE's product improvement policy, technical specifications may change without notice.